
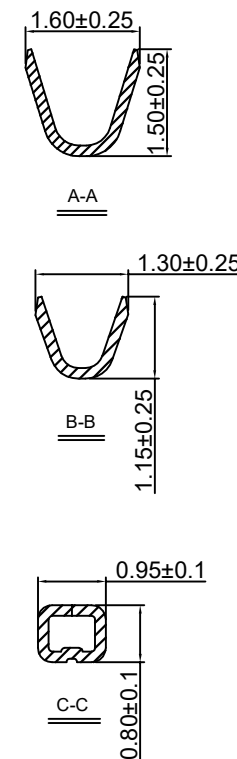
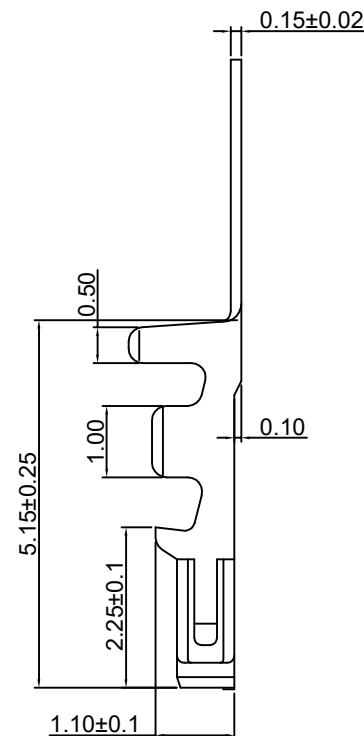


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2013-05-07




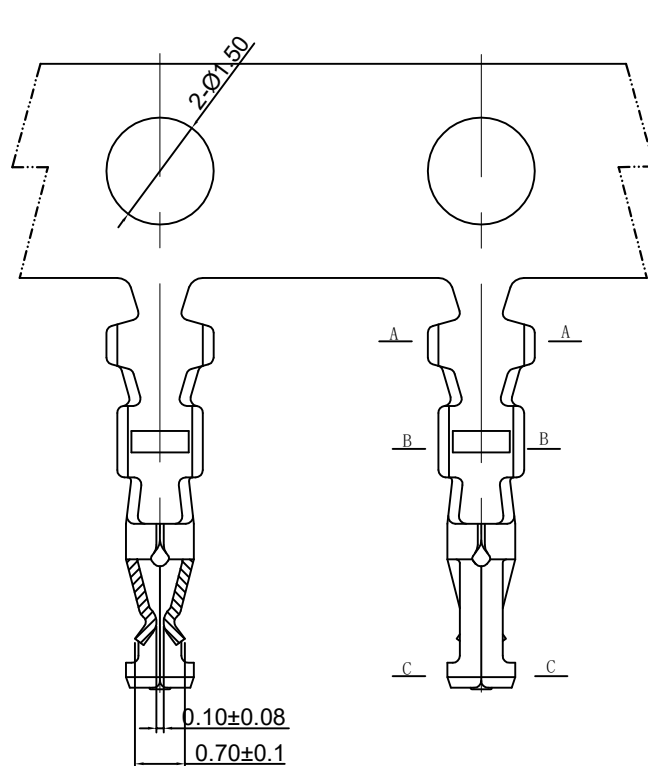


Notes:

1. MATERIAL: 0.150 mm PHOSPHOR BRONZE,C5191

 深圳市华德共创科技有限公司 Shenzhen Huade co-create Technology Co.,LTD TEL : 0755-27129737 FAX : 0755-29940187							
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				 	TITLE: 1.25mm Pitch 产品名称: Crimp Terminal		
X.X	±0.30	X.X°	±3°	APPD: 核准: XIE	PART NO: 产品编号: HDGC1256-T		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对: WANG	DATE	SCALE	UNIT
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图: WANG	2013-05-07	1:1	mm
							CODE NUMBER
							A001


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2013-05-07

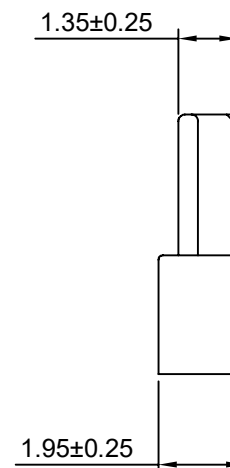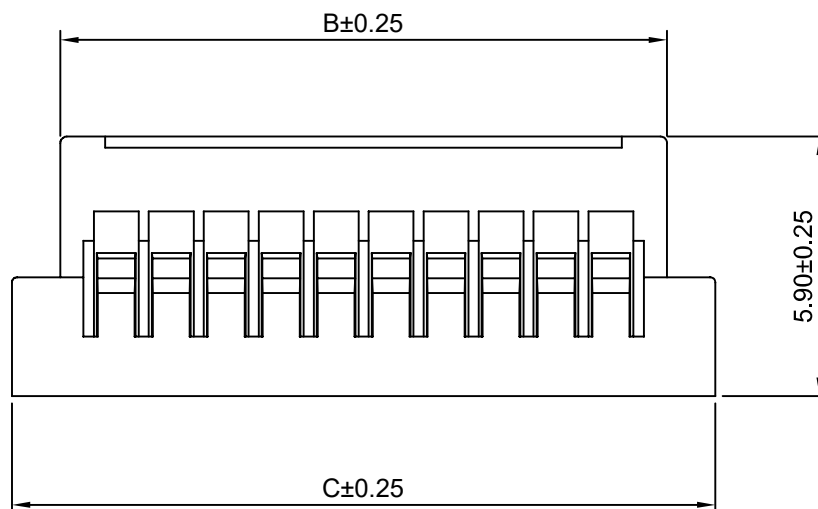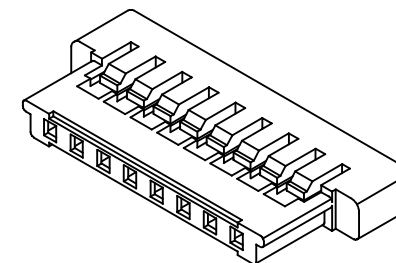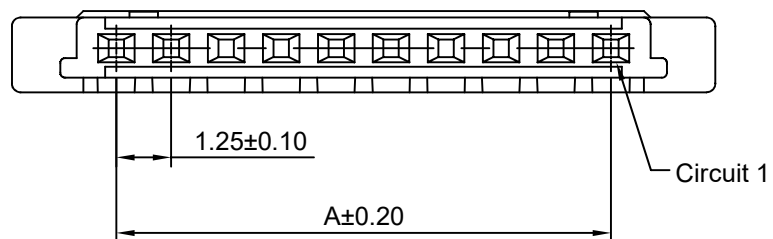






Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.25	3.80	6.00	10P	11.25	13.80	16.00
3P	2.50	5.05	7.25	15P	17.50	20.05	22.25
4P	3.75	6.30	8.50	20P	23.75	26.30	28.50
5P	5.00	7.55	9.75	25P	30.00	32.55	34.75
6P	6.25	8.80	11.00	30P	36.25	38.80	41.00
8P	8.75	11.30	13.50				

SPECIFICATIONS:
Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 40mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(Black)

		深圳市华德共创科技有限公司							
Shenzhen Huade co-create Technology Co.,LTD									
TEL : 0755-27129737					FAX : 0755-29940187				
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称: 1.25mm Pitch Housing			
X.X	±0.30	X.X°	±3°	APPD: 核准: XIE		PART NO: 产品编号: HDGC1256H-XP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对: WANG		DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图: WANG		2013-05-07	6:1	mm	A008

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2013-05-07

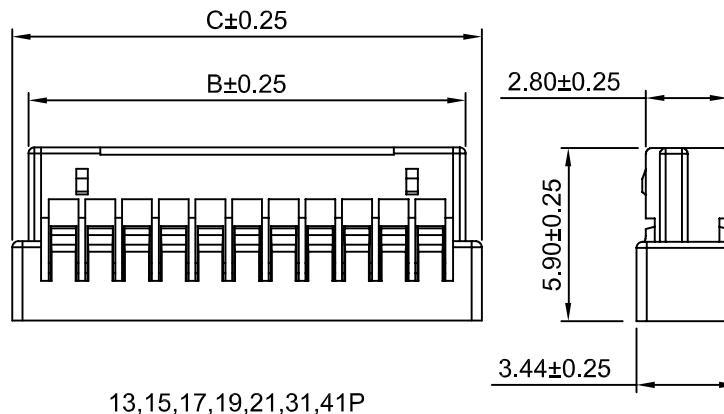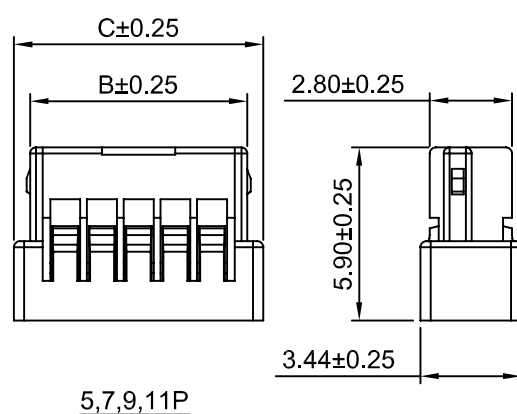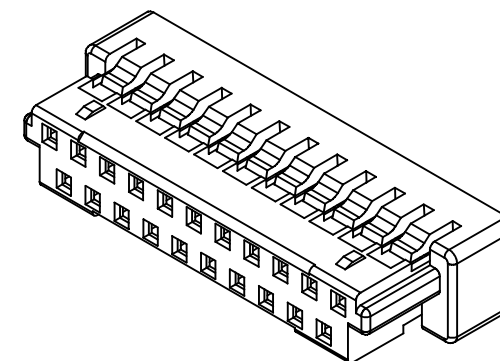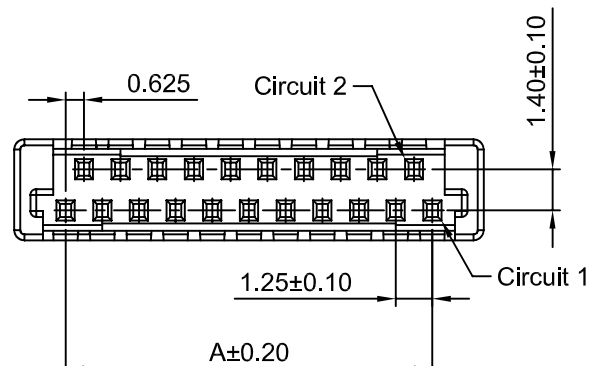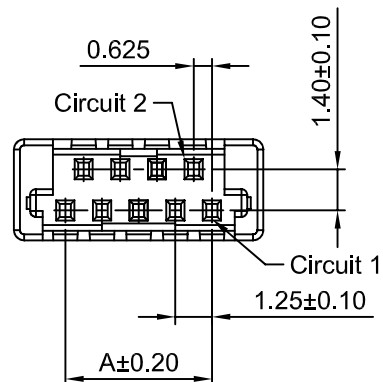

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
5P	2.50	4.90	6.00	17P	10.00	12.40	13.50
7P	3.75	6.15	7.25	19P	11.25	13.65	14.75
9P	5.00	7.40	8.50	21P	12.50	14.90	16.00
11P	6.25	8.65	9.75	31P	18.75	21.15	22.25
13P	7.50	9.90	11.00	41P	25.00	27.40	28.50
15P	8.75	11.15	12.25				





SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 40mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(Black)

HDGC 深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 1.25mm Pitch Housing	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
				PART NO: 产品编号:	HDGC1256HD-XP
				DATE	SCALE
				UNIT	CODE NUMBER
				2013-05-07	4:1 mm A008

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2013-05-07

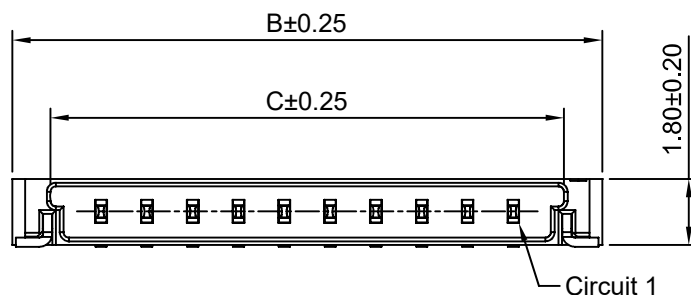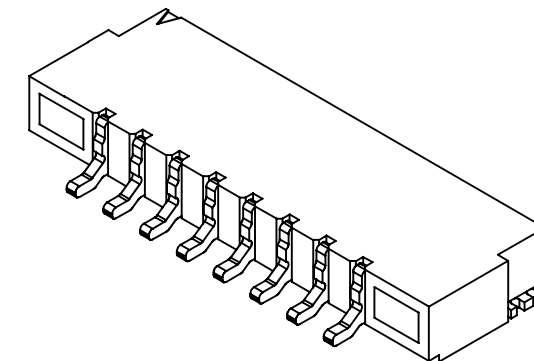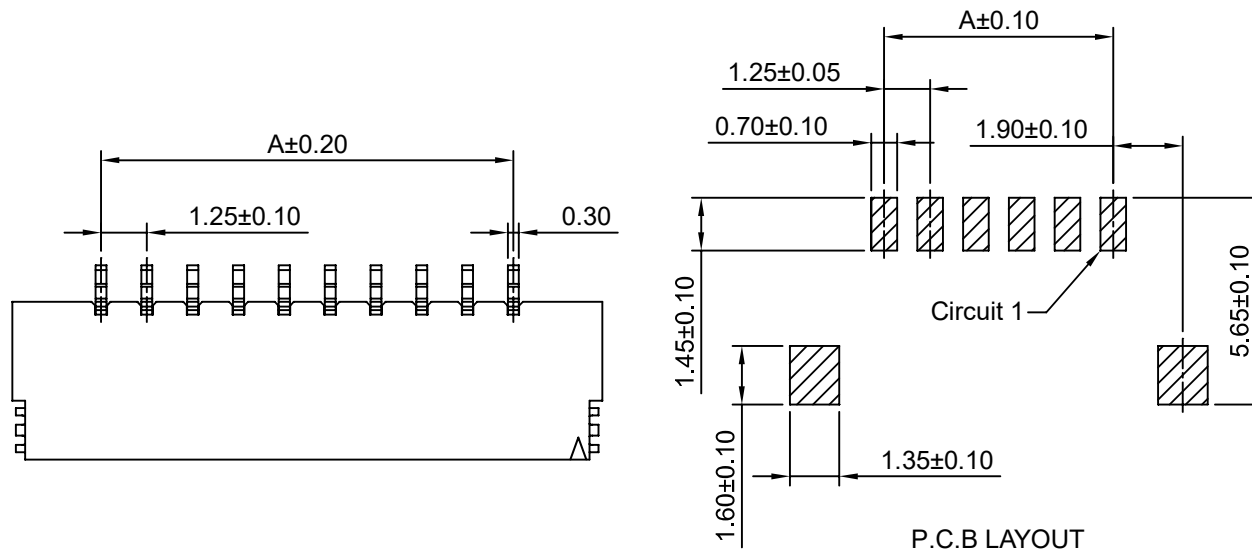

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.25	6.10	4.01	10P	11.25	16.10	14.01
3P	2.50	7.35	5.26	15P	17.50	22.35	20.26
4P	3.75	8.60	6.51	20P	23.75	28.60	26.51
5P	5.00	9.85	7.76	25P	30.00	34.85	32.76
6P	6.25	11.10	9.01	30P	36.25	41.10	39.01
8P	8.75	13.60	11.51				

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 40mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Gold over Nickel
Solder Tabs: Brass/Tin over Nickel
Material: Nylon 6T,UL94V-0(White)








深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 1.25mm Pitch 产品名称: 90 ° Wafer			
X.X	±0.30	X.X°	±3°	APPD: 核准: XIE	PART NO: HDGC1256WR-S-XP 产品编号:				
X.XX	±0.30	X.XX°	±2°	CHECK: 校对: WANG	DATE	SCALE	UNIT	CODE NUMBER	
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图: WANG	2013-05-07	5:1	mm	A008	

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2013-05-07

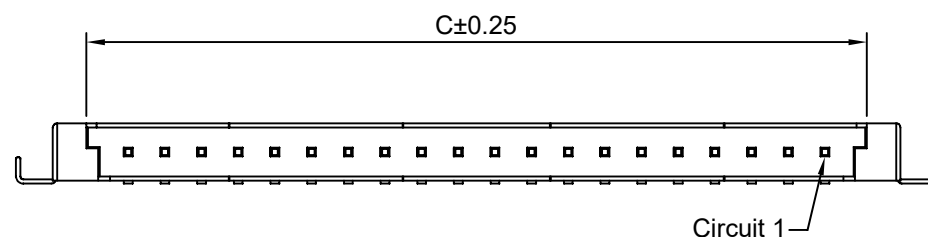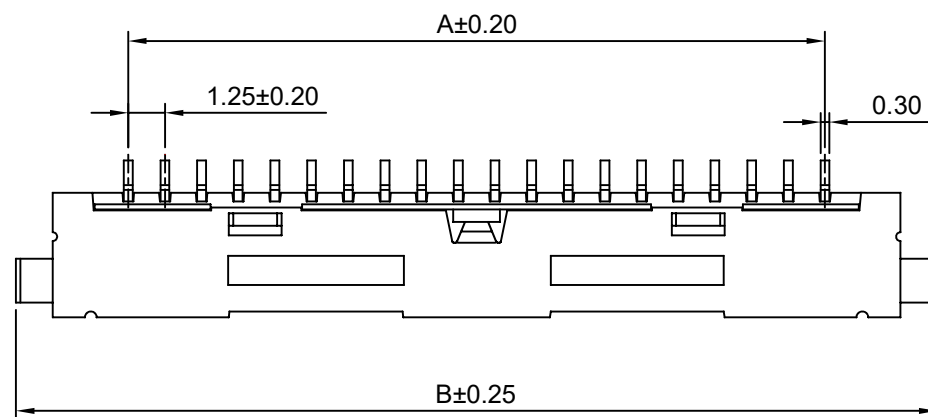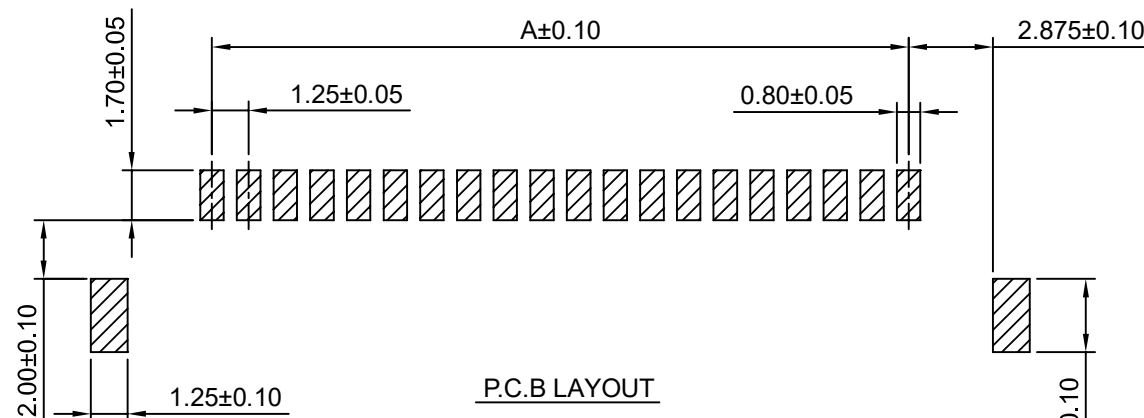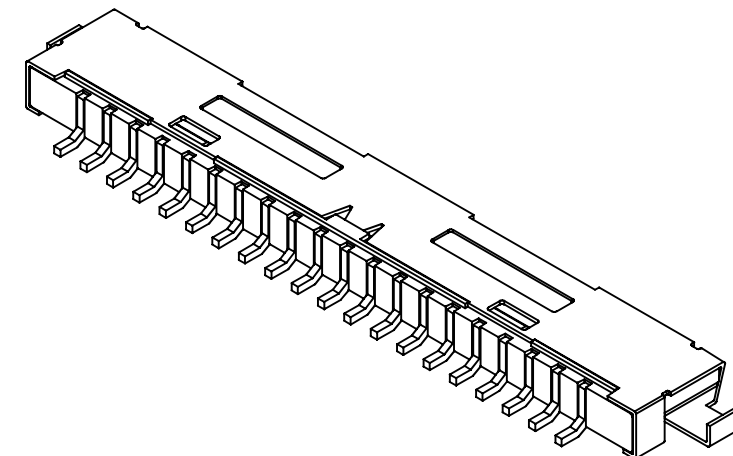

SPECIFICATIONS:
Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 40mΩ Max.
Insulation Resistance: 100MΩ Min.
Pin Material: Brass/Tin over Nickel
Solder Tabs: Brass/Tin over Nickel
Material: LCP,UL94V-0(White)





Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
20P	23.75	31.40	26.60
30P	36.25	43.90	39.10

HDGC 深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 1.25mm Pitch 产品名称: 90° Wafer			
X.X	±0.30	X.X°	±3°	APPD: 核准: XIE	PART NO: 产品编号: HDGC1256WRA-S-XP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对: WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图: WANG	2013-05-07	4:1	mm	A008

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2013-05-07

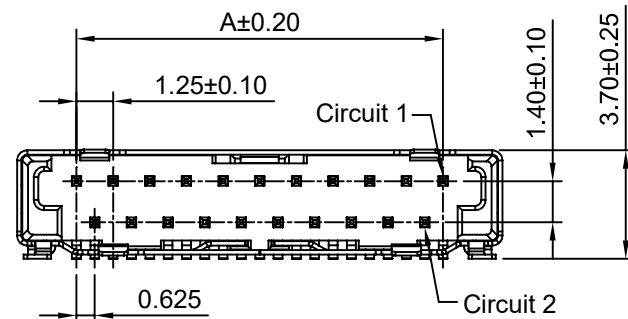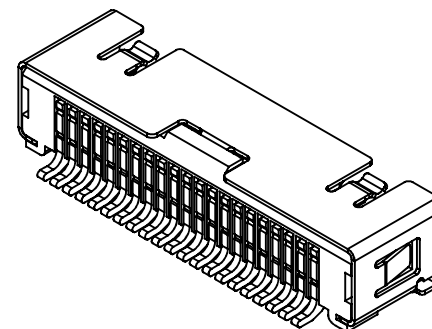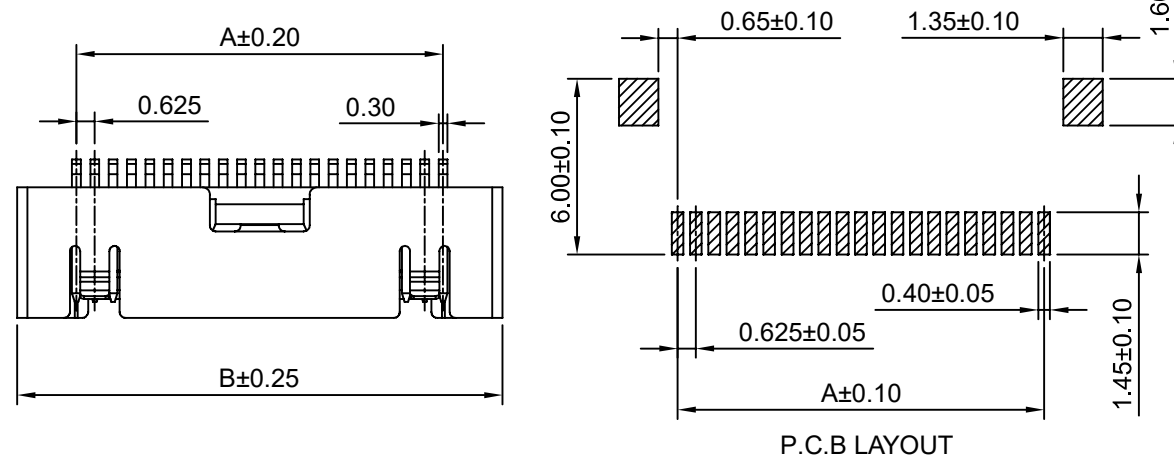

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
21P	12.50	16.55
31P	18.75	22.80
41P	25.00	29.05

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 40mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Gold over Nickel
Shell: Brass/Tin over Nickel
Material: Nylon 6T,UL94V-0(White)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD





TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 1.25mm Pitch 90° Wafer			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: 产品编号: HDGC1256WRD-S-XP	
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2013-05-07	4:1
						UNIT	CODE NUMBER
						mm	A008

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2013-05-07

Ordering Information:
HDGC1256WRA-S-XP - G
1 2

- 1.Part NO.
2.Finish:
(blank): Tin over Nickel
G: Gold over Nickel

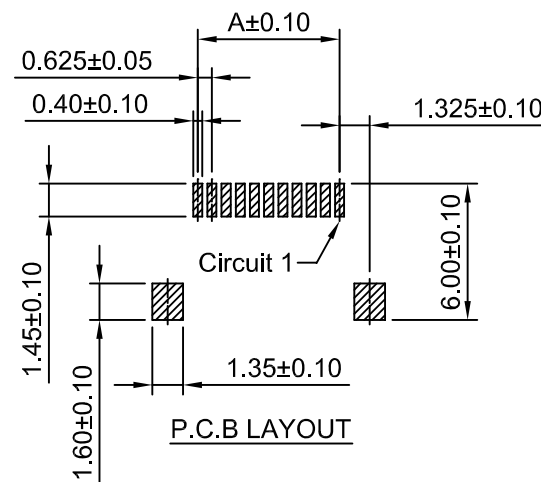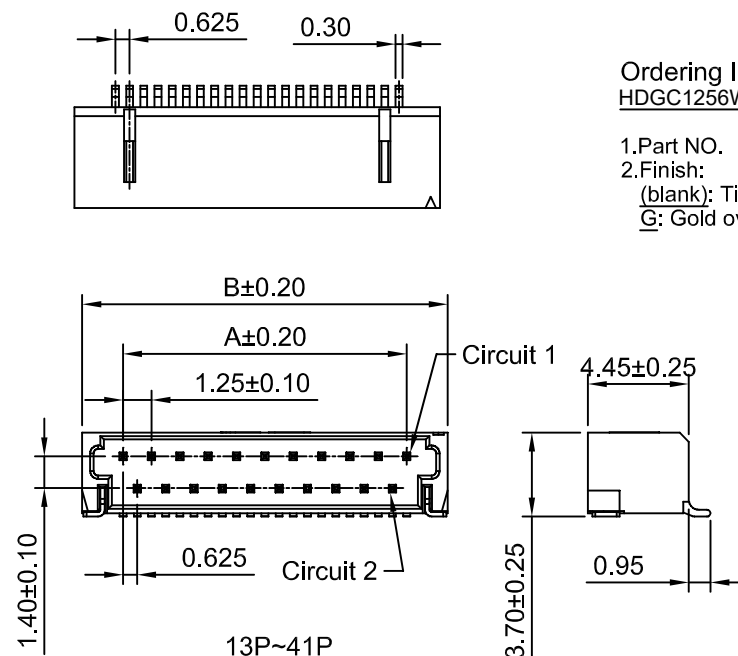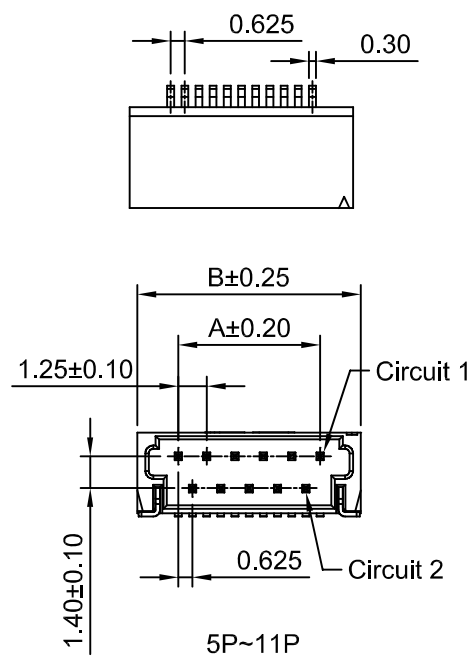

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range:-25°C ~ +85°C
Contact Resistance: 40mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze
Solder Tabs: Brass
Material: Nylon 6T,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
5P	2.50	6.10
7P	3.75	7.35
9P	5.00	8.60
11P	6.25	9.85
13P	7.50	11.10
15P	8.75	12.35
17P	10.00	13.60
19P	11.25	14.85
21P	12.50	16.10
31P	18.75	22.35
41P	25.00	28.60








深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 产品名称：1.25mm Pitch 90° Wafer			
X.X	±0.30	X.X° ±3°	APPD: 核准：	XIE	PART NO: 产品编号：HDGC1256WRDA-S-XP-G			
X.XX	±0.30	X.XX° ±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX° ±1°	DRAW: 绘图：	WANG	2013-05-07	3:1	mm	A008

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2013-05-07

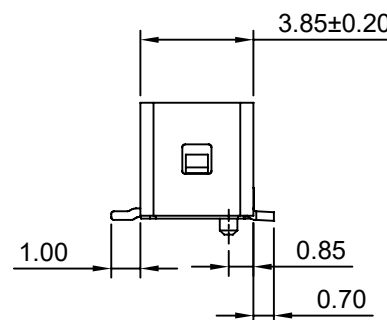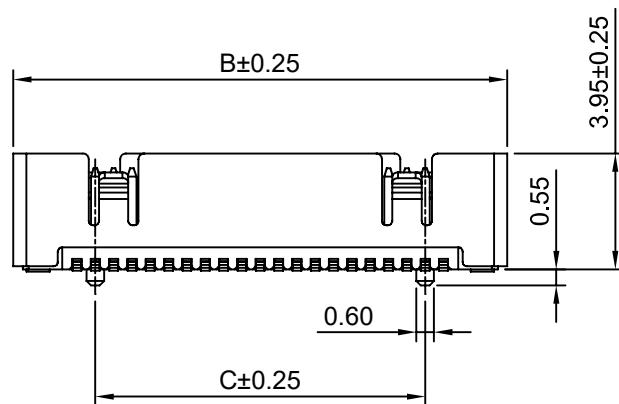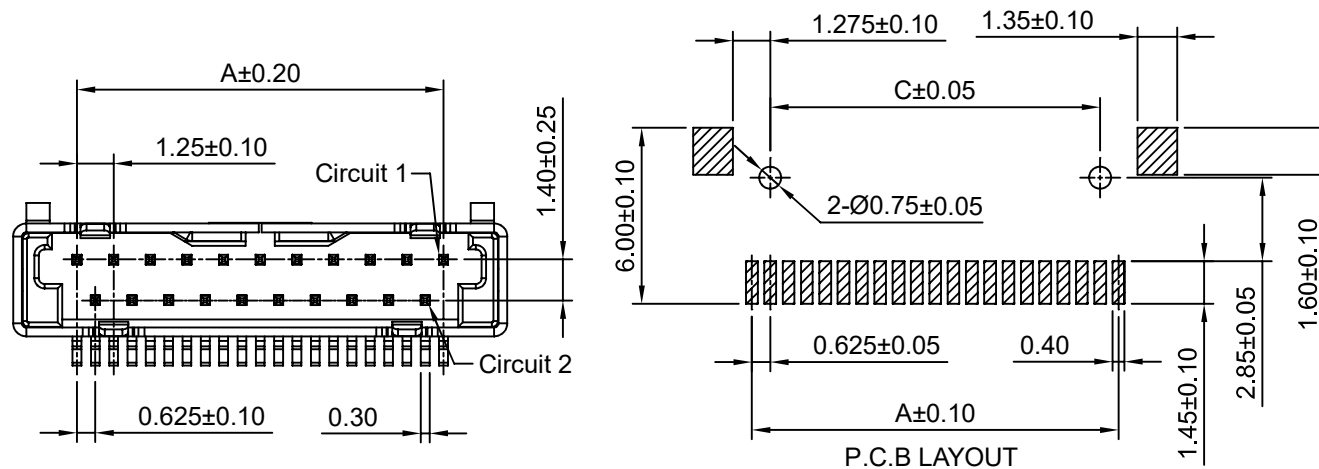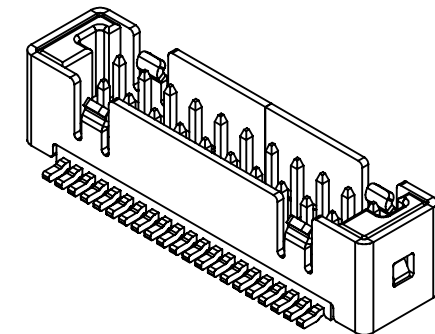

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
21P	12.50	16.85	11.25
31P	18.75	23.10	17.50

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 40mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Gold over Nickel
Shell: Phosphor Bronze/Tin over Nickel
Cap: Nylon 6T,UL94V-0(Black)
Material: Nylon 6T,UL94V-0(White)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 1.25mm Pitch 产品名称: 180 ° Wafer			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: HDGC1256WVD-S-F-XP 产品编号:			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2013-05-07	4:1	mm	A008